


NEW

LAMPIONE URBANO ROTOSIMMETRICO

CITYONE

IP65



SOURCE		OUTPUT			
60 W	8.100 lm	7.800 lm	3000K	CTY-604530 NEW	372,00 €
			4000K	CTY-604540	

- 200-240 V
- IP65
- IK08
- 138°
- GREY RAL 9006
- Ø 60 mm POLE CONNECTION
- HIGH DISSIPATION
- TEMPERED GLASS
- DIE CAST ALUMINUM
- 50.000 H L70/B50
- 5 YEARS
- CAM

OPTIONAL




RIDUTTORE/ADATTATORE IN ALLUMINIO PER PALI DA Ø 75 A Ø 60 MM
ALUMINUM ADAPTER/REDUCER FOR POLES FROM Ø 75 TO Ø 60 MM

ATP-CTY	15,50 €
----------------	---------

Struttura in alluminio pressofuso verniciata con polveri epossidiche resistenti alla corrosione. Diffusore in vetro temperato resistente agli shock termici e agli urti.

Structure in die-cast aluminum painted with corrosion resistant epoxy powders. Diffuser in tempered glass resistant to thermal shock and impact.

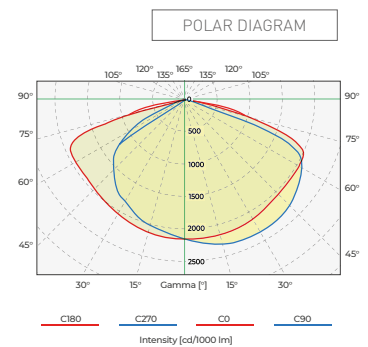

COMPLIANCE

EMC DIRECTIVE 2014/30/EU | EN IEC 55015:2019+A11/A11:2020 | EN 61547:2009 | EN IEC 61000-3-2:2019 | EN 61000-3-3:2013+A1:2019
LVD DIRECTIVE 2014/35/EU | EN 60598-2-3:2003+A1:2011 | EN IEC 60598-1:2021 EN 62493:2015 | EN IEC 62031:2020
ROHS DIRECTIVE 2011/65/EU | IEC 62321-3-1:2013 | IEC 6231-4:2013+A1:2017
IEC 6231-5:2013 | IEC 62321-6:2015 | IEC 62321-7-1:2015 | IEC 62321-8:2017